



ADSORPTIVE REMOVAL OF HEAVY METAL CHROMIUM FROM AQUEOUS MEDIUM USING MODIFIED NATURAL ADSORBENT

B. Saritha, Dr. M.P. Chockalingam

Department of Civil Engineering, BIHER,
Bharath University, Selaiyur, Chennai-73, INDIA

ABSTRACT

One of the serious environmental issues is the presence of toxic heavy metals contaminants in water bodies because of discharge of untreated heavy metals due to urbanization, combustion byproducts, automobile emissions, mining activities. Chromium is widely used in many industries and usually present in high concentration in the aqueous medium. This study involved the investigation of the adsorption of hexavalent form of the heavy metal (Cr) by modified corncob. The study demonstrated that the corncob has a moderate potential to remove hexavalent chromium. The equilibrium data of adsorption very well fitted into the models and the maximum loading capacity was obtained from adsorption isotherms by applying the Langmuir model.

Key words: Hexavalent Chromium, Corncob, Adsorbent, Aqueous Solution, Batch Adsorption Experiments.

Cite this Article: B. Saritha and M.P. Chockalingam, Adsorptive Removal of Heavy Metal Chromium From Aqueous Medium Using Modified Natural Adsorbent. International Journal of Civil Engineering and Technology, 8(8), 2017, pp. 1382–1387. <http://www.iaeme.com/IJCIET/issues.asp?JType=IJCIET&VType=8&IType=8>

1. INTRODUCTION

Disposal of heavy metals in ground by human activity is nowadays increased due to urbanization, combustion byproducts, automobile emissions, mining activities. Disposed heavy metals are not biodegradable substances and they tend to accumulate in living organism causing various disease and disorder (Bailey et al., 1999)¹. Among the toxic heavy metals, hexavalent form of chromium is known to cause wide range of human health effect including mutagenic and carcinogenic risks (Park and Jung)^{2,3}.

Heavy metal like chromium is used in various industries and are usually present in high concentration in the aqueous medium which are usually released directly into the environment without any pretreatment. The commonly used treatment methods includes chemical precipitation, reverse osmosis, evaporation, ion exchange etc. Among these methods, adsorption has been proved to be very effective technique.

The adsorption batch study has been conducted to examine the use of corncob in the adsorptive removal of chromium ions.

2. MATERIALS AND METHODS

2.1. Adsorbent Preparation

The corncob was cleaned with water to remove dust and insoluble substances and dried. Then powdered and corncob grains passing through 600 microns sieve were taken and washed again until pH 7. Then corncob chemically treated with hydrochloric acid (HCl) and was termed as activated corncob. A suspension containing 30 gm corncob, 500 ml of distilled water and 10 ml of 0.5 N HCl was prepared in a beaker. The contents in the beaker was stirred for 1 hr magnetic stirrer. After filtering, the corncob was cleaned many times using distilled water until the filtrate pH became neutral. The corncob was kept in the oven at 100°C for 60 minutes and again dried in air at room temperature.

The concentration of chromium in adsorbent was determined by placing 2g of adsorbent in 20ml distilled water for 1 hour with continuous agitation, after which it was centrifuged with laboratory centrifuge. The supernatant was carefully decanted and analysed using AAS (Atomic Absorption Spectrophotometer).

2.2. Adsorbate solution

Hexavalent chromium solution was made by taking 1.41g of $K_2Cr_2O_7$ and dissolved in 100 ml distilled water. The prepared solution can be used by diluting as required to obtain standard solutions.

2.3. Experimental study

The study has been conducted by agitating standard solution for 30 minutes in orbital shaker. Experimental study was conducted by varying the dosage of adsorbent from 0.2gm/100ml to 1.6gm/100ml solution with concentration of hexavalent chromium of 50mg/l. Adsorption isotherm study was performed by changing Cr (VI) concentration from 10-80mg/l while the dosage of corncob is maintained at 0.4gm/100ml and with pH between 2-12.

The quantity of metal ions adsorbed per gram of adsorbent and the adsorption efficiency (%) were found using the following expressions:

$$Q = \frac{C_0 - C_e}{M} \times V \quad (1)$$

$$\text{Sorption efficiency (\%)} = \frac{C_0 - C_e}{C_0} \times 100 \quad (2)$$

Q_e = concentration of adsorbent after equilibrium

C_0 = adsorbate initial concentration

C_e = adsorbate final equilibrium concentration after adsorption has occurred

M = mass of corncob

V = volume

2.4. Adsorption isotherms

The Freundlich and Langmuir adsorption isotherm models were used. The Freundlich isotherm (Freundlich, 1906)⁵ is given as

$$\text{Log } (Q_e) = \text{Log } (K_f) + (1/n)[\text{Log } C_e] \quad (3)$$

(K_f) = Constant called Freundlich constant

(n)= Freundlich constant indicates the intensity of sorption

Langmiur isotherm (Langmiur, 1918)⁶ is expressed as

$$[C_e/Q_e] = [1/Q_m b] + [C_e/Q_m] \quad (4)$$

Q_m and b are constants.

3. DISCUSSIONS

3.1. Study of corncob dosage

The removal of Cr (VI) increased with increase of adsorbent dosage and it has been clearly depicted in **Fig 1**. However, the adsorption capacity showed a decreasing trend with increasing dosage. Adsorption capacity was maximum at 0.4g/l.

3.2. Study of contact time

The adsorption of hexavalent chromium with respect to time is shown in From **Fig. 2**. In this the percentage removal increases with more contact time and the equilibrium was obtained after 50 minutes. Therefore, the adsorption for 50 minutes could be considered for whole batch experiments. The agitation speed was 150 r.p.m.

3.3. Study of pH

The adsorption of Cr (VI) slows down with increase in pH (**Fig 3**). At pH range 3-4, the maximum adsorption takes place.

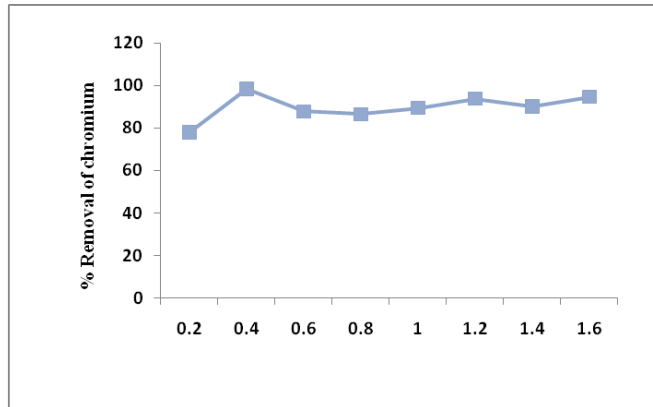


Figure 1 Study of varying dosage of corncob on adsorptive removal of Cr(VI)

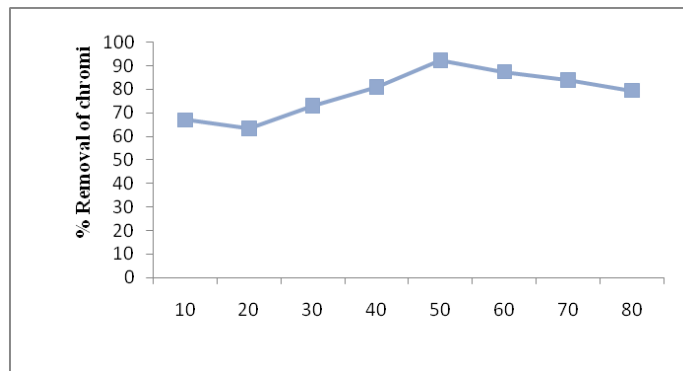


Figure 2 Study of varying time of contact on adsorptive removal of Cr(VI)

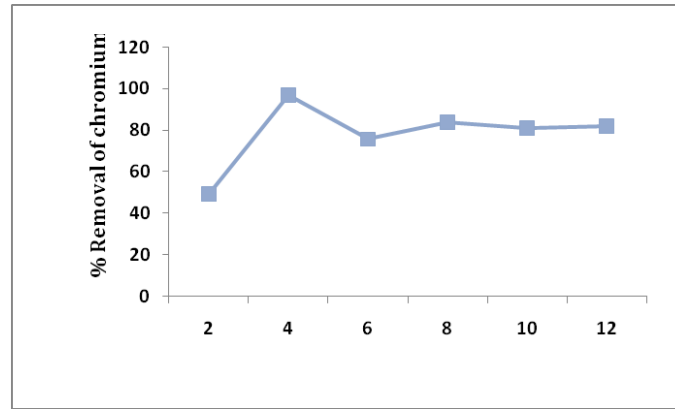


Figure 3 Study of varying pH on adsorptive removal of Cr (VI)

3.4. Adsorption Isotherm Models

3.4.1. Langmiur Plot

The plots of the Langmuir graph shows us that the removal process obeys Langmuir adsorption isotherm as shown in Fig. 4. Q_m and b obtained were presented in Table 1. R_L , defined by (Hall et al.)⁷.

$$R_L = \frac{1}{1 + bC_0} \quad (5)$$

Where C_0 is metal ions (mg/l) and b is the constant (1/mg).

Table 1 The values of R_L for adsorption of hexavalent chromium on modified corncob

Q_m (mg/g)	b (1/mg)	Hexavalent chromium concentration [C_0 (mg/l)]	R_L
14.79	0.716	10	0.1225
		20	0.0652
		30	0.044
		40	0.033
		50	0.027
		60	0.022
		70	0.019
		80	0.017

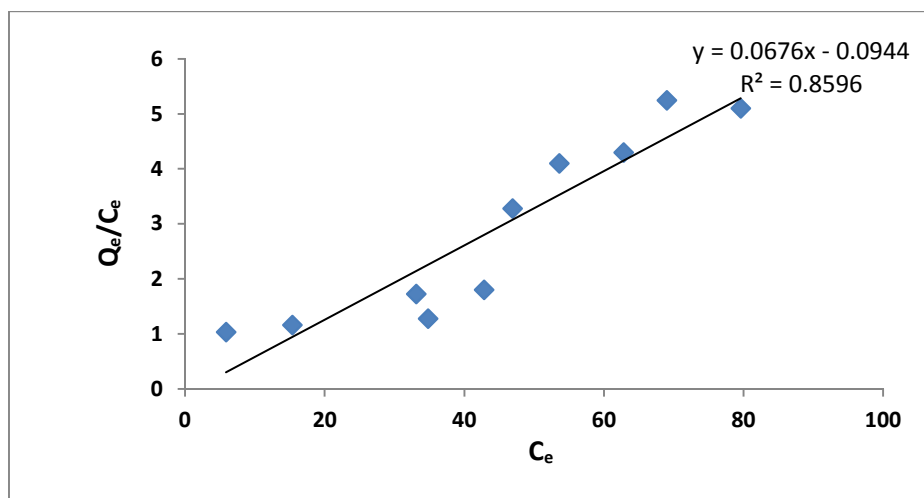


Figure 4 Langmuir Plot for adsorption of hexavalent chromium

3.4.2. Freundlich adsorption isotherm

The adsorption of hexavalent chromium follows Freundlich isotherm model obtained from graph of $\text{Log } Q_e$ vs $\text{Log } C_e$ in **Fig. 5** ($K_f = 5.02$ and $n = 1.4345$). The modified corncob shows value of 'n' as 1.4345 which proves effective removal of hexavalent chromium from aqueous medium because according to Treyball⁸, $n = 1-10$ is considered as a good adsorbent.

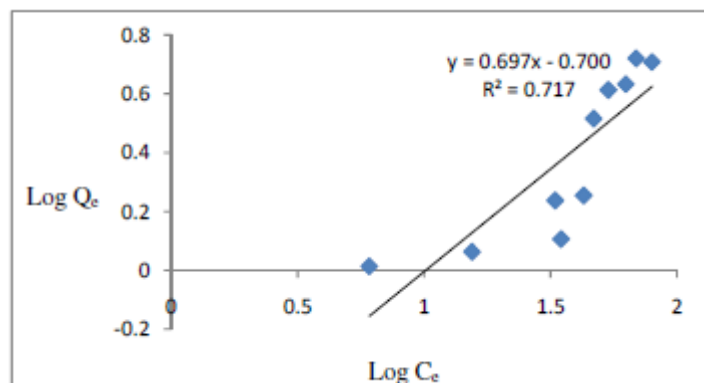


Figure 5 Freundlich Plot

4. CONCLUSION

The modified corncob has a moderate potential to remove hexavalent chromium. The adsorptive removal percentage of hexavalent chromium depends on dosage of adsorbent, pH, time of contact, and initial concentration of hexavalent chromium. The results demonstrated that the modified corncob can be more efficient natural adsorbent for maximum removal of hexavalent chromium.

REFERENCES

- [1] Kumar J., Sathish Kumar K., Dayakar P., Effect of microsilica on high strength concrete, International Journal of Applied Engineering Research, v-9, i-22, pp-5427-5432, 2014.
- [2] Dayakar P., Vijay Ruthrapathi G., Prakesh J., Management of bio-medical waste, International Journal of Applied Engineering Research, v-9, i-22, pp-5518-5526, 2014.
- [3] Iyappan L., Dayakar P., Identification of landslide prone zone for coonoortalukusing spatial technology, International Journal of Applied Engineering Research, v-9, i-22, pp-5724-5732, 2014.
- [4] Swaminathan N., Dayakar P., Resource optimization in construction project, International Journal of Applied Engineering Research, v-9, i-22, pp-5546-5551, 2014.
- [5] Swaminathan N., Sachithanandam P., Risk assessment in construction project, International Journal of Applied Engineering Research, v-9, i-22, pp-5552-5557, 2014.
- [6] Srividya T., Kaviya B., Effect on mesh reinforcement on the permeability and strength of pervious concrete, International Journal of Applied Engineering Research, v-9, i-22, pp-5530-5532, 2014..
- [7] Udayakumar, R., Khanaa, V., Kaliyamurthie, K.P., Performance analysis of resilient fth architecture with protection mechanism, Indian Journal of Science and Technology, v-6, i-6, pp-4737-4741, 2013.
- [8] Sandhiya K., Kaviya B., Safe bus stop location in Trichy city by using gis, International Journal of Applied Engineering Research, v-9, i-22, pp-5686-5691, 2014.
- [9] Ajona M., Kaviya B., An environmental friendly self-healing microbial concrete, International Journal of Applied Engineering Research, v-9, i-22, pp-5457-5462, 2014.

Adsorptive Removal of Heavy Metal Chromium From Aqueous Medium Using Modified Natural Adsorbent

- [10] Kumar J., Sachithanandam P., Experimental investigation on concrete with partial replacement of scrap rubber to granite stones as coarse aggregate, *International Journal of Applied Engineering Research*, v-9, i-22, pp-5733-5740, 2014.
- [11] Sachithanandam P., Meikandaan T.P., Srividya T., Steel framed multi storey residential building analysis and design, *International Journal of Applied Engineering Research*, v-9, i-22, pp-5527-5529, 2014.
- [12] Srividya T., Saritha B., Strengthening on RC beam elements with GFRP under flexure, *International Journal of Applied Engineering Research*, v-9, i-22, pp-5443-5446, 2014.
- [13] Saraswathy R., Saritha B., Planning of integrated satellite township at Thirumazhisai, *International Journal of Applied Engineering Research*, v-9, i-22, pp-5558-5560, 2014.
- [14] Langmuir I. The adsorption of gases on plant surfaces of glass, mica and platinum. *J. Am. Chem. Soc.*, 1918; 40: 1361-1368.
- [15] 15. Hall KR, Eagleton LC, Acrivos A and Vermeulen T. Pore and solid diffusion kinetics in fixed bed adsorption under constant pattern condition. *Ind. Eng. Chem. Fundam.* 1966; 5,212-223.
- [16] Treyball RE, Mass transfer operations. 3rd ed, McGraw Hill: New York, 1980.
- [17] Bailey, JE & Ollis, DF. *Biochemical Engineering Fundamentals*, Mc-Graw-Hill Book Company: Singapore, 1986.
- [18] Vinith and Sridevi H, Removal of Copper from Aqueous Solution using Ground Granulated Blast Furnace Slag as Adsorbent. *International Journal of Civil Engineering and Technology*, 8(4), 2017, pp. 837-84.
- [19] Buddharatna Godbole and Prashant Nagarnaik, Groundnut Shell: Effective Adsorbent for Defluoridation from Aqueous Solution. *International Journal of Civil Engineering and Technology*, 7(6), 2016, pp.51 – 60.
- [20] Park S and Jung WY. Removal of chromium by activated carbon fibres plated with copper metal. *Carbon Sci.* 2001; 15-21.
- [21] Jianlong Wang. Biosorbents for heavy metal removal and their future. *Elsevier, biotechnology advances*, 2000.
- [22] APHA, AWWA and WEF, *Standard Methods for the Examination of Water and Wastewater*, 18th ed. American Public Health Association, Washington, DC.1992.