



AN EFFICIENT IMAGE COMPRESSIONS COMPARATIVE ANALYSIS FOR FUNDUS IMAGES

Ali Ibrahim Khaleel and N.A.H. Zahri

School of Computer and Communication Engineering,
University Malaysia Perlis, Malaysia

ABSTRACT

Image compression approaches are used for images that are not easy to analyze or are not able to compress in efficient manner. Such robust algorithms are particularly significant for systems conveying and archiving necessary information or statistics, because the compression of fundus images is necessary to gather the medical data about the patient's health. So this paper deals with the comparative analysis of four efficient image compression techniques named as discrete wavelet transform (DWT), Adaptive dictionary algorithms, Super spatial prediction and Chain codes. The image compression comparison is done in terms of peak signal to noise ratio and mean square error rate which are used to check the robustness of compressing the fundus images and shows that which is the most efficient for the compressions. The whole scenario is implemented using MATLAB 2016a environment.

Key words: Image compression, fundus images, wavelet transform, chain codes, spatial predictions.

Cite this Article: Ali Ibrahim Khaleel and N.A.H. Zahri, An Efficient Image Compressions Comparative Analysis for Fundus Images. *International Journal of Civil Engineering and Technology*, 9(1), 2018, pp. 165-171.

<http://www.iaeme.com/IJCIET/issues.asp?JType=IJCIET&VType=9&IType=1>

1. INTRODUCTION

An image is defined as a four-sided collection of pixel units. The pixel units of a gray scale sample of image are a non-negative number construed as the strength in terms of the brightness, radiance of the sample of the image. When the pixel of the image intensities deals with the range of 0 to 2^n-1 , formerly we can say that image deals with depth of N bit or we can say that the size of image is N-bit. Generally gray scale sample images are having bit depths ranges 8 to 16 number of bits. Gray scale compression of images processes are recycled as a foundation for shaded image compression systems and for procedures squeezing which deals with the 2-dimensional statistics categorized by the precise sleekness. These procedures are recycled for 3-dimensional volumetric data. Every now and then such statistics is flattened by regular image solidity procedures. The universal algorithm can also be used for image compressions, i.e., encoding an arrangement of pixel units which are extracted from the image to be compressed in an effectual manner. For worldwide procedures it is sometimes hard to compress the sample of the fundus images. Universal processes are frequently aimed

for script sizes not surpassing 28 and do not achieve the image data features directly which are: images with 2-dimensional statistics, strengths of adjacent pixels are extremely correlated, and the imageries comprise noise which is added to the pixels of the image throughout the acquisition procedure. These features make compression of the dictionary processes that perform worse than numerical ones for image statistics. Contemporary gray scale compression processes employ methods used in widespread numerical compression procedures. However, statistical exhibiting and entropy calculation of the image is distorted to make it informal to compress.

In this paper the comparative analysis of the compression processes includes discrete wavelet transform (DWT), Adaptive dictionary algorithms, super spatial prediction and Chain codes are discussed in the paper. Various efficient researches are done by the researchers which are also discussed in this paper. Chandresh k parmar, Kruti pancholi [1] et al. deliberated various types of explanations for the compressions and the different approaches for effectual image compressions. Sonal Chawla, Meenakshi Beri, Ritu Mudgil [2] et al. proposed solidity of data or statistics on digital images. Their objective is to reduce the redundancy of image data which must be able to transmit highly effectual manner. George Toderici, Damien Vincent, Nick Johnston, Sung Jin Hwang et al. [5] presents a lossy image compression processes which deals with the neural networks. They have discussed variable rates of concentrations and densities throughout distribution without any retraining of the neural network system. Poonam Dhumal, S. S. Deshmukh et al. [6] exploit image compression which is based on the decomposition approach and shows that the algebraic transforms are able to achieve high compression ratios. Ahmed A. Nashat, N. M. Hussain Hassan et al. [7] presents Haar wavelet transform which deals with the collection of prearrangement filters in terms of low and high pass filter banks

2. DISCRETE WAVELET TRANSFORM

The wavelet transform has gained widespread acceptance in image compression. Wavelet transform decomposes a signal into a set of basis functions. These basis functions are called wavelets. Wavelets are attained from a single prototype wavelet named mother wavelet by dilations and shifting. The DWT has been introduced as a highly efficient and flexible method for sub band decomposition of data. The 2D-DWT is nowadays established as a key operation in signal processing .It is multi-resolution analysis and it decomposes images into wavelet coefficients and scaling function.

In DWT algorithm used in image s of length N , the DWT consists of $\log_2 N$ stages at most. Starting from s , the first step produces two sets of coefficients: approximation coefficients cA_1 , and detail coefficients cD_1 . These vectors are obtained by convolving s with the low-pass filter Lo_D for approximation, and with the high-pass filter Hi_D for detail, followed by dyadic decimation. The length of each filter is equal to $2N$.

If $n = \text{length}(s)$, the signals F and G are of length $n + 2N - 1$, and then the coefficients cA_1 and cD_1 are of length

$$\text{Floor}((n-1)/2) + N$$

The next step splits the approximation coefficients cA_1 in two parts using the same scheme, replacing s by cA_1 and producing cA_2 and cD_2 , and so on. So the wavelet decomposition of the signal s analyzed at level j has the following structure: $[cA_j, cD_j, \dots, cD_1]$. Conversely, starting from cA_j and cD_j , the IDWT reconstructs cA_{j-1} ,

inverting the decomposition step by inserting zeros and convolving the results with the reconstruction filters.

3. ADAPTIVE DICTIONARY ALGORITHMS

Dictionary algorithms are the adaptive algorithms which are used in any harsh or distorted regions of the image to perform compression and do not scramble solitary symbols as variable dimension bit strings. The symbols or indications form the directory or index into a dictionary phrases. If the symbols are less significant than the phrases of the dictionaries, they get replacements and compression happens. This type of compression is easier to recognize because it deals with the strategy that coders or programmers are aware with using directories into databases to recover information from large quantities of loading and storage.


4. SUPER SPATIAL PREDICTION

The spatial prediction predicts a pixel value which is based on the neighboring pixel color values and scrambles the modification among the past and actual current statistics to get more effective solidity. As the modification becomes lesser, the data to be determined becomes lesser also. These types of prediction approaches depend on prediction, modeling and entropy. Predictor eliminates a large quantity of spatial dismissals which exploits flat zones in descriptions. Modeling based on the context prediction by obtaining the information around pixels background, like edges in horizontal and vertical domain. Entropy removes numerical redundancy which gives the final encoding of the stream of the bits.

5. CHAIN CODES

It is one of the efficient compression techniques which are based on the principle to separately encoding of component of the image or we can say the blob in the image. For each region, boundary points are selected and transmission of coordinates takes place. The encoder changes along the borderline of the section and transmit a representation which deals with the direction of the undertaking. These remains until starting position of the encoder at which the whole description of the blob is given and encoding remains continue with the following blob in the sample of the image to be compressed. This programming technique is mainly effective for images containing reasonably small amount of interconnected components in the image.

6. METHODOLOGY BLOCK DIAGRAM

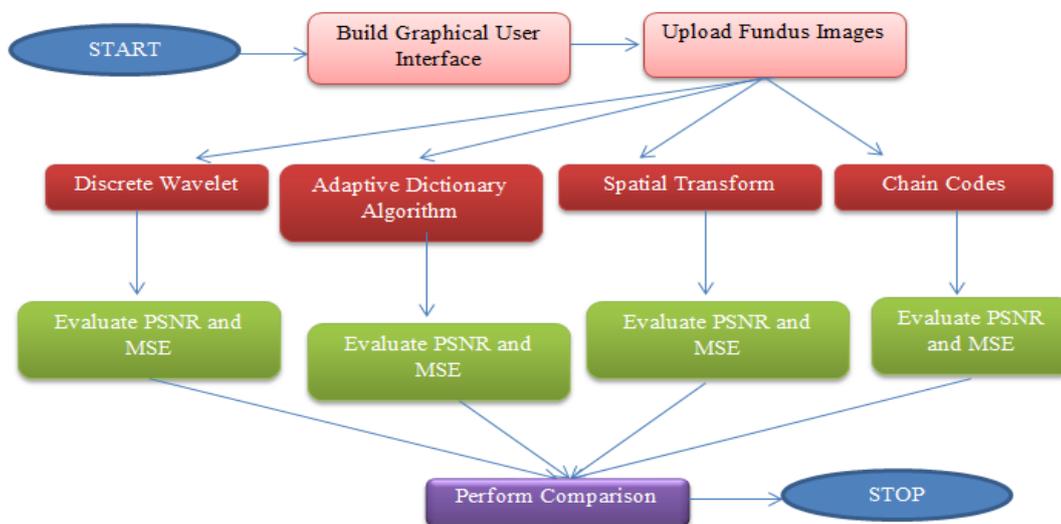

7. RESULTS AND DISCUSSIONS

Results and discussions are one of the important aspects for evaluation of the robustness in image processing. So the following discussion deals with the simulation and comparative analysis of our proposed approach.

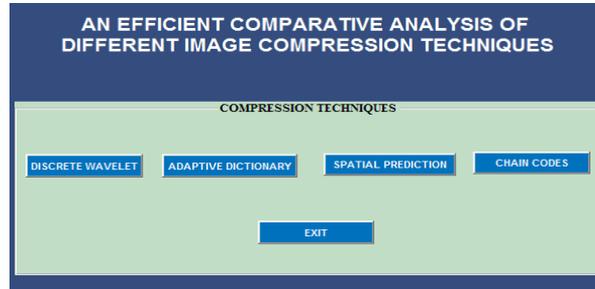


Figure 1 Main Panel

The figure 1 shows the main panel which is made using graphical user interface in MATLAB. It consists of the pushbuttons of different techniques for the comparative analysis of the different compression techniques for the fundus images which will also help in the medical applications

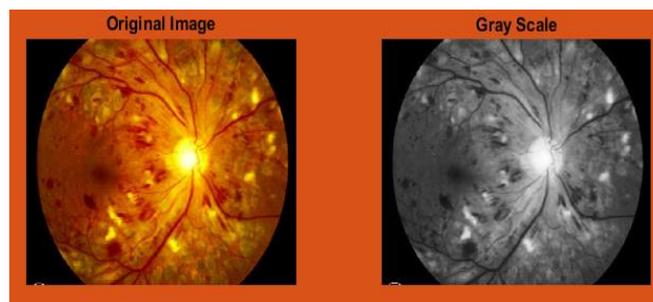


Figure 2 Original and Grey scale

The figure 2 shows the original and grey scale image format which is done for the pre-processing of the image which is done by clicking on the pushbuttons of uploading and grey scaling

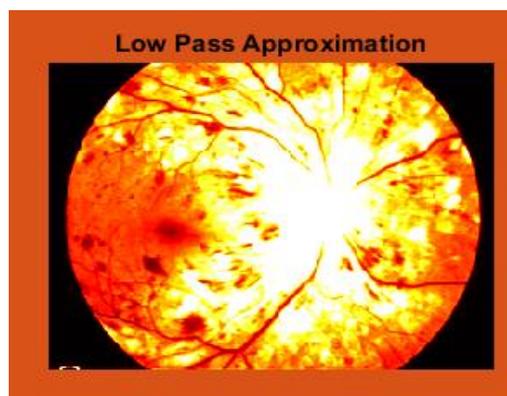


Figure 3 Low pass approximation

The figure 3 shows the output of the image for the low pass approximation which deals with filtration processes using high pass and low pass filtering. These are used to remove the distortions of the images by using the up sampling processes.

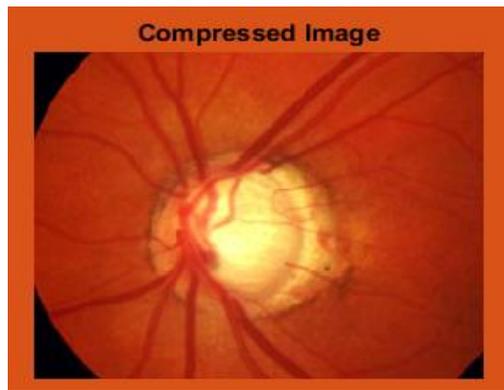


Figure 4 (a) Compressed image

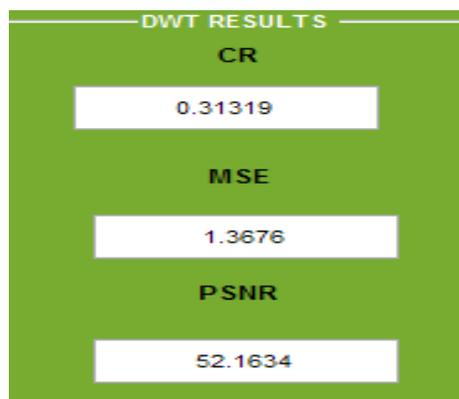


Figure 4 (b) Performance using DWT

The figure 4 (a) and 4 (b) shows the performance evaluation using discrete wavelet transform in terms of compression ratio, mean square error rate and peak signal to noise ratio. The peak signal to noise is 43.56 db, mean square error rate is coming 3.19, and compression ratio is coming 0.82. in the similar manner we will check the evaluation with rest of the algorithms for the compression

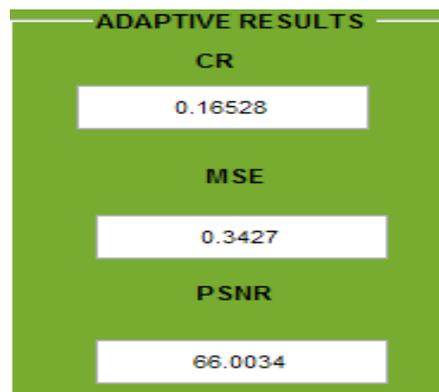


Figure 5 Performance using Adaptive Dictionary approach

The figure 5 shows the performance evaluation using **Adaptive Dictionary** in terms of compression ratio, mean square error rate and peak signal to noise ratio. The peak signal to noise is 57.38 db, mean square error rate is coming 0.80, and compression ratio is coming 0.314 which is far better than dwt.

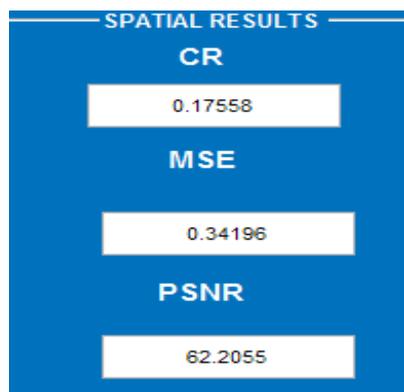


Figure 6 Performance using Spatial Prediction

The figure 6 shows the performance evaluation using **special prediction** in terms of compression ratio, mean square error rate and peak signal to noise ratio. The peak signal to noise is 48.77 db, mean square error rate is coming 0.799, and compression ratio is coming 0.334



Figure 8 Performance using chain codes

The figure 8 shows the performance evaluation using **chain code** in terms of compression ratio, mean square error rate and peak signal to noise ratio. The peak signal to noise is 57.40 db, mean square error rate is coming 0.79978, and compression ratio is coming 0.314

Table 1 Performance Comparison with advantages and disadvantages

Technique	Advantages	Disadvantages	PSNR	MSE	CR
Discrete Wavelet Transform	More flexibility in terms of noise filtering	More Complex in terms of high computations	52.1634	1.3676	0.31319
Adaptive Dictionary	Very helpful in re-construction of the images	Due to high code word sequence size it decreases the compression ratio	66.0034	0.3427	0.16528
Spatial Prediction	Low complexity in distorted environments	High complexity when in recursive process	62.2055	0.34196	0.17558
Chain codes	Segmentation of the images are having less complexity	Variations decreases the quality of image	66.0249	0.34196	0.16528

8. CONCLUSIONS

As image compression is one of the important parts in the medical images. So in our proposed work we have analyzed and compare the performance of the fundus images in terms of image compression using compression ratio, mean square error rate and peak signal to noise ratio. As we can notices from the table 1 that if there are advantages of the proposed work then there are also some disadvantages which really exist in real world scenarios. As we can notice that the adaptive dictionary approach is having high peak signal to noise ratio and less mean square error rate which shows that the adaptive dictionary scenario is more robust than other compression techniques in terms of PSNR and MSE in distorted environments but if we talk about the compression ratio the discrete wavelet is having high compression ratio than other scenario which shows that the wavelet transform is well suited for increasing compression ratios which used low and high pass filters. The future scope deals with the hybridization approaches of two compression algorithms which can perform better than the individual approaches with less error rate probabilities

REFERENCES

- [1] Parmar, Chandresh K., and Kruti Pancholi. "A Review on Image Compression Techniques." *Journal of Information, Knowledge & Research in Electrical Engineering* (2013)
- [2] Chawla, Sonal, Meenakshi Beri, and Ritu Mudgil. "Image Compression Techniques: A Review." *International Journal of Computer Science and Mobile Computing* 3, no. 8 (2014).
- [3] Kumar, Thaneshwar, and Ramesh Kumar. "A Survey On Medical Image Compression Using Hybrid Compression Technique (DWT, DCT and Huffman coding)." *International Journal of Management, IT and Engineering* 4, no. 10 (2014): 142.
- [4] Kaur, Malwinder, and Navdeep Kaur. "A Litreature Survey on Lossless Image Compression." *ISSN (Online)* (2015): 2278-1021.
- [5] Toderici, George, Damien Vincent, Nick Johnston, Sung Jin Hwang, David Minnen, Joel Shor, and Michele Covell. "Full resolution image compression with recurrent neural networks." *arXiv preprint arXiv:1608.05148* (2016).
- [6] Dhupal, Poonam, and S. S. Deshmukh. "Survey on Comparative Analysis of Various Image Compression Algorithms with Singular Value Decomposition." *International Journal of Computer Applications* 133, no. 6 (2016): 18-21.
- [7] Nashat, Ahmed A., and NM Hussain Hassan. "Image compression based upon Wavelet Transform and a statistical threshold." In *Optoelectronics and Image Processing (ICOIP), 2016 International Conference on*, pp. 20-24. IEEE, 2016.
- [8] Alshehri, Saleh Ali. "Neural network technique for image compression." *IET Image Processing* 10, no. 3 (2016): 222-226.
- [9] Al-hamid, Ali A., Y. Ahmed, and Reda A. El-Khoribi. "Optimized Image Compression Techniques for the Embedded Processors." *Int J Hybrid Inform Technol* 9 (2016): 319-28.
- [10] Kozhemiakin, Ruslan, Sergey Abramov, Vladimir Lukin, Blazo Djurović, Igor Djurović, and Benoit Vozel. "Lossy compression of Landsat multispectral images." In *Embedded Computing (MECO), 2016 5th Mediterranean Conference on*, pp. 104-107. IEEE, 2016.
- [11] JNVR Swarup Kumar and R Deepika. An Optimized Block Estimation Based Image Compression and Decompression Algorithm. *International Journal of Computer Engineering and Technology*, 7 (1), 201 6 , pp. 09 - 17 .
- [12] Ali Ibrahim and N.A.H. Zahri, An Review on Robust and Efficient Techniques for Image Compression. *International Journal of Computer Engineering & Technology*, 9 (1), 2018 , pp. 1 – 7 .
- [13] Syam Babu Vadlamudi, Koppula Srinivas Rao, A L Siridhara and R Karthik. Region of Interest (ROI)-based Image Compression for Telemedicine Applications. *International Journal of Mechanical Engineering and Technology*, 8(7), 2017, pp. 133–139.